

Spit C Strap Cable Fixing

Unique one-piece demountable fixing for quick installation of permanent or temporary cables and tubes.



Fixing Cables

Substrates

- Concrete
- Aerated concrete
- Stone
- Hollow slab

Applications


- Fixing cables
- Conduit
- Tubes



Product Advantages

- Polyamide 6 material
- UV stabilised version available in black
- Visible proof the anchor is fully set when the head of the nail sits flush with the top of the expansion portion of the anchor

Installation

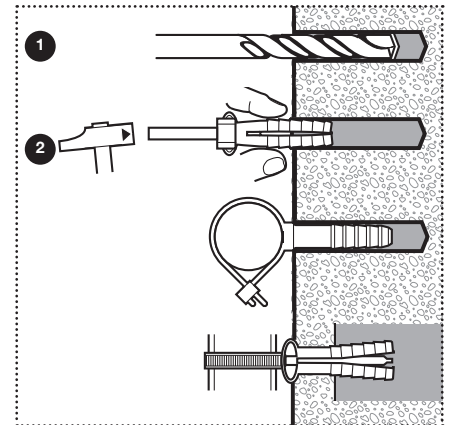

Technical Specification

This anchor requires minimal preparation prior to insertion in the hole. The expansion portion of the anchor is set by hammering in an integral expansion nail. The cable or conduit tubes are then secured using the cable tie feature. The fixture can be demountable at any time by releasing the cable tie, the body of the anchor remains in the substrate and can be re-used.

Material

Polyamide 6 is resistant to weathering, ageing and rotting. Withstands temperatures from -20°C to +60°C. It has good electrical insulation properties. It has high tensile and compressive strength and is largely resistant to chemical attack.

Product Range - C Strap



Eurocode	Hole Ø	Cable Range Ø	Min Hole Depth	Colour	Box Qty
058300	8mm	6 - 25mm	40mm	Black (anti UV)	200
058310	8mm	6 - 25mm	40mm	Natural	200